

WELCOME TO COOPERATE !

# GONGGONG HOSE

HOME WATER SUPPLY SYSTEM SAFETY PROTECTION SPECIALIST

ADD

No.15 Caoe Road, Binhai New City, Yuyao, Zhejiang Province, China

TEL

0086-574-87333968

WEBSITE


[www.nbgonggong.com](http://www.nbgonggong.com)



NINGBO HUAHUA SANITARY WARE CO., LTD.

PROFESSIONAL SANITARY  
WARE MANUFACTURER



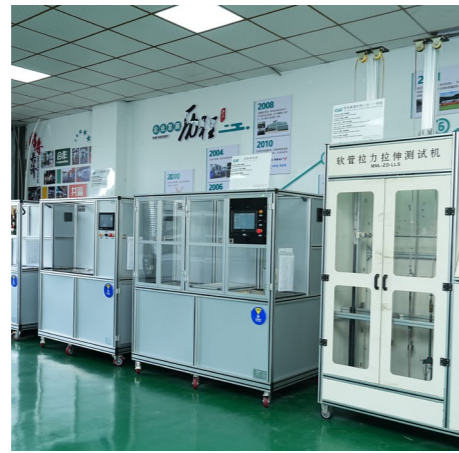

# Established in 2000

## Company Profile

Founded in 2000 and based in Ningbo, Huahua has grown into a focused hose specialist serving premium sanitary brands worldwide. With a 14,000+ m<sup>2</sup> production campus, 120+ employees and cumulative sales beyond 500M pcs hoses, we combine industrial scale with skilled engineering to deliver braided, shower and PVC hose systems in premium finishes.

TOTO

COTTO

FERRO

GENEBRE

novaservis

QM  
Quality Metal  
100% Acrylic Reinforced

E.C.A.  
TOGETHER FOR YEARS

Adell

Halabi

26+  
Establishment Time

4  
Core Office


120+  
Number of Employee

14000 m<sup>2</sup>+  
Factory Area

# STAINLESS BRAIDED HOSE



**KITCHEN** **BATH PLUMBING**

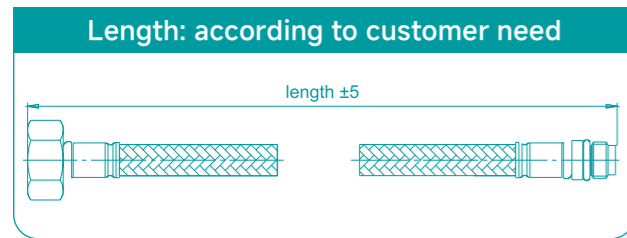

Engineering Excellence for Every Drop.

## Product Advantages & Features

A versatile powerhouse for kitchen faucets and water heaters, this hose features a high-density 304 stainless steel weave. It provides maximum protection against high water pressure and temperature fluctuations. Engineered for a leak-free connection, it is the gold standard for reliable, long-term home plumbing.


## Technical Specification

- Max. operating temperature  
70°C 158°F
- Max. temperature  
90°C 194°F
- Burst pressure  
> 10 bar > 145 psi
- Max. working pressure  
10 bar 1450 psi
- Tensile strength  
> 1400 N > 315 lbf
- Bending radius  
30 mm 1.2"
- Outer diameter (braided) max.  
11.8mm 0.5"
- Flow rate  
(300 mm, 3 bar, open atmosphere)  
28 l/min 7.4 gpm

## Product Certifications



## Braiding Options

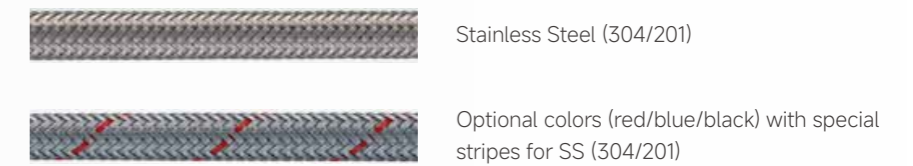

## Female Connections:



## Male Connections:




# NYLON BRAIDED HOSE


KITCHEN BATH PLUMBING



Length: according to customer need

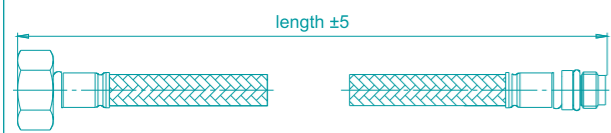

Structure

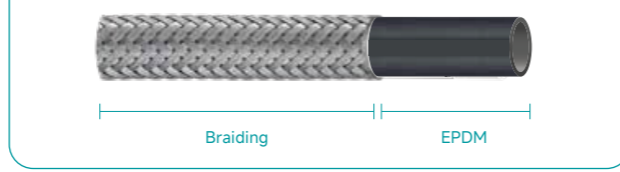

## Product Advantages & Features

Perfect for under-sink installations and vanity faucets, the nylon braiding offers a smooth, non-abrasive finish that won't scratch surfaces. This hose is exceptionally flexible, making it easy to maneuver in tight cabinet spaces. It combines modern aesthetics with a high-strength core for safe, everyday water usage.

## Technical Specification

- Max. operating temperature  
70°C 158°F
- Max. temperature  
90°C 194°F
- Burst pressure  
10 bar 145 psi
- Max. working pressure  
> 150 bar > 2176 psi
- Tensile strength  
> 1000 N > 225 lbf
- Bending radius  
≥25 mm ≥1"
- Outer diameter (braided) max.  
9.2 mm 0.36"
- Flow rate  
(300 mm, 3 bar, open atmosphere)  
≥16 l/min ≥4.8 gpm

## Product Certifications



## Braiding Options



## Female Connections:



## Male Connections:




Where Quality Flows, Peace of Mind Follows.

# BRAIDED HOSE FOR HVAS


WATER HEATERS AND SOFTENERS



Length: according to customer need

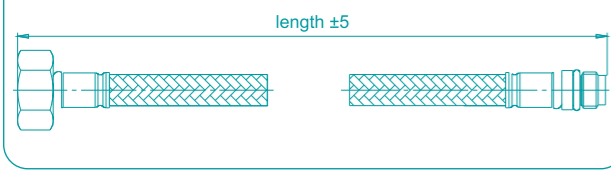

Structure

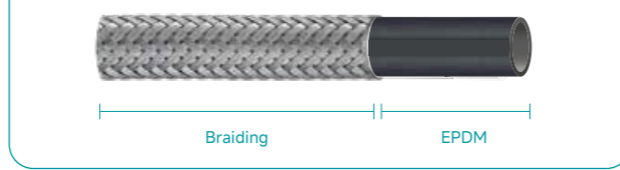

Expertly Crafted. Rigorously Tested.  
Safety Guaranteed.

## Product Advantages & Features

These flexible hoses can attain worldwide approvals and are thus suitable for use in every country. They have excellent hygienic properties as well as high resistance to pressure and temperature. The extraordinarily chemical-resistant inner hose protects against additives to the drinking water like chlorine.

## Technical Specification

	DN10	DN13	DN20	DN25	DN32
Max. operating temperature	70° C 158° F	70° C 158° F	70° C 158° F	70° C 158° F	75° C 158° F
Max. temperature	110° C 230° F	110° C 230° F	110° C 230° F	110° C 230° F	110° C 230° F
Max. working pressure	10 bar 145 psi	10 bar 145 psi	10 bar 145 psi	10 bar 145 psi	6 bar 87 psi
Burst pressure	>80 bar >1160 psi	>75 bar >1088 psi	>60 bar >870 psi	>45 bar >653 psi	>30 bar >435 psi
Tensile strength	1500 N 337 lbf	2000 N 450 lbf	4500 N 1012 lbf	n/a	n/a
Bending radius	35 mm 1.4"	45 mm 1.8"	75 mm 3.0"	90 mm 3.5"	120 mm 4.7"
Outer diameter (braided)	14 mm 0.6"	19.5 mm 0.8"	27.5 mm 1.1"	34 mm 1.3"	41 mm 1.6"
Inner diameter of fitting	7.5 mm 0.3"	10 mm 0.4"	16 mm 0.6"	17.5 mm 0.7"	23 mm 0.9"
open atmosphere)	45 l/min 11.9 gpm	60 l/min 15.9 gpm	145 l/min 38.3 gpm	n/a	n/a
Braiding	SST	SST	SST	SST	SST
Inlet + outlet fittings	3/8" 1/2" 3/4" 3/8" elbow 1/2" elbow 3/4" elbow 1/2" male	1/2" 3/4" 1/2" elbow 3/4" elbow 1/2" male 3/4" elbow	3/4" 1" 3/4" elbow 3/4" male	1" 1" elbow 1" male	1 1/4" 1 1/4" male

## Product Certifications



EN13618



KTW  
W270

## Braiding Options



Stainless Steel (304/201):



Polyester (PET/ PE/ PA):

## Female Connections



## Male Connection



## Elbow Connection






# FLEXIBLE PEX HOSE


KITCHEN BATH PLUMBING



Length: according to customer need

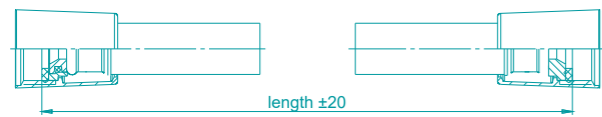

Structure

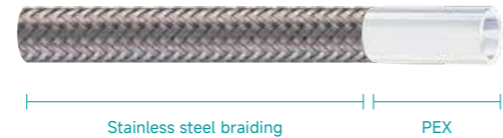

## Product Advantages & Features

The ultimate choice for potable water lines and toilet tanks, our PEX hose features a food-grade inner tube that ensures water remains pure and odorless. It is highly resistant to mineral buildup and corrosion. Backed by a 10-year warranty, it delivers peace of mind for family health.

## Technical Specification

- Max. operating temperature  
70°C 158°F
- Max. temperature  
90°C 194°F
- Burst pressure  
> 10 bar > 145 psi
- Max. working pressure  
10 bar 1450 psi
- Tensile strength  
> 1400 N > 315 lbf
- Bending radius  
30 mm 1.2
- Outer diameter (braided) max.  
11.8mm 0.5
- Flow rate  
(300 mm, 3 bar, open atmosphere)  
28 l/min 7.4 gpm

## Product Certifications



EN13618



## Braiding Options



Stainless Steel (304/201):



Polyester (PET/ PE/ PA):



Optional colors (red/blue/black) with special stripes for SS (304/201):

## Female Connections:



F1/2



F1/4



F3/8



F3/4

## Male Connections:



M1/2



M3/4



M3/8



M8



M10




Pure Water, Protected by Our Precision.

# QUICK-CONNECT HOSE




## QUICK FAUCET CONNECTOR

### Length: according to customer need

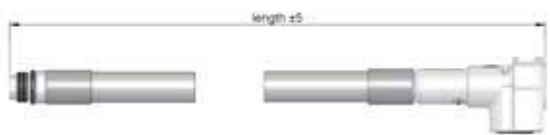

### Design

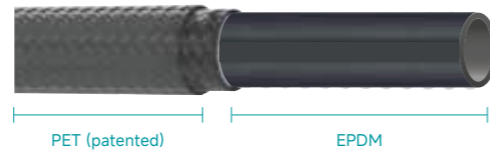

Unyielding Strength,  
Gracefully Embracing Every Stream.

## Product Advantages & Features

Designed for the modern installer, this hose is perfect for modular plumbing and rapid faucet replacement. The snap-in mechanism eliminates the need for bulky tools, ensuring a tight, drip-proof seal instantly. It's the ideal blend of professional-grade quality and effortless DIY convenience for fast-paced renovations.

## Technical Specification

- Max. operating temperature  
60°C    140°F

---

- Max. temperature  
70°C    158°F

---

- Burst pressure  
6 bar    87 psi

---

- Max. working pressure  
> 40 bar    > 580 psi

---

- Tensile strength  
> 500 N    > 112 lbf

---

- Outer diameter (braided) max.  
10.1 mm    0.4"

---

- Flow rate  
(300 mm, 3 bar, open atmosphere)  
26 l/min    6.9 gpm

## Product Certifications



EN13618



## Braiding Options



# STAINLESS SHOWER HOSE

SHOWER SHATTAF



Length: standard length 150, 175, 200 cm

Design



The Hidden Strength Behind Every Perfect Shower.

## Product Advantages & Features

Elevate your bathroom or bathtub experience with this double-lock stainless steel hose. Its kink-resistant design ensures a steady water flow, even when stretched. The sleek, chrome-like finish resists tarnishing and rust, providing a premium touch that stays beautiful and functional through years of daily showers.

## Technical Specification

Max. operating temperature  
70°C 158°F

Burst pressure  
3 bar 44 psi

Tensile strength  
> 700 N > 157 lbf

Bending radius  
≥ 35 mm 1.4"

Outer diameter max.  
14 mm 0.6"

Inner diameter (hose)  
7.5 mm 0.3"

Flowrate at 1.5 m length  
19.0 L/min at 3 bar  
according to DIN EN 1113


## Product Certifications



EN13618




## Braiding Options

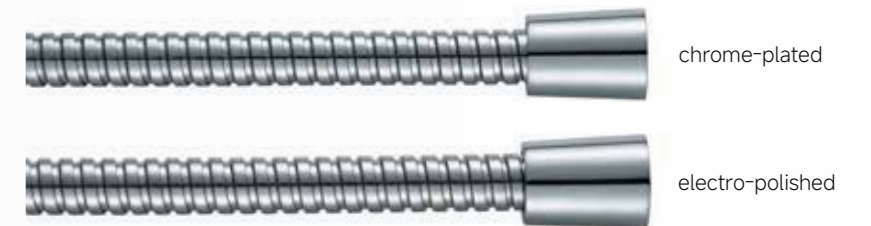


## Nut Selection




G1/2"

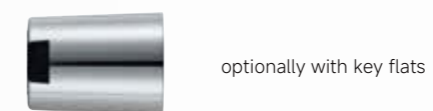

optionally with key flats

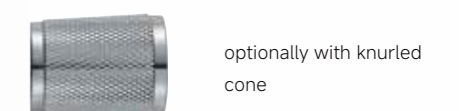



optionally with knurled cone

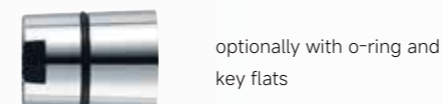

optionally with o-ring and key flats

# PVC SHOWER HOSE

SHOWER SHATTAF

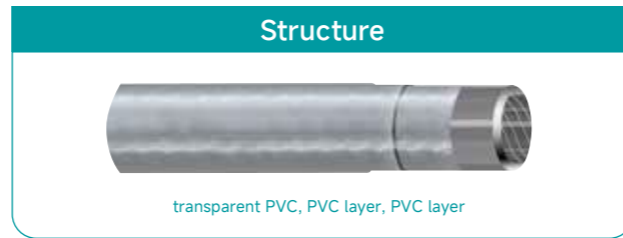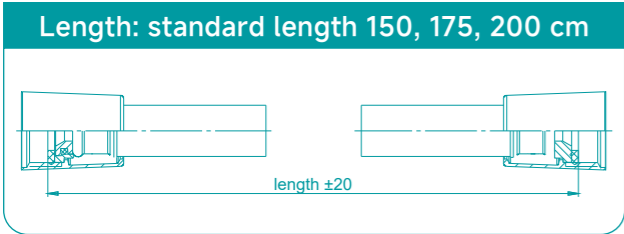

Simple Elegance,  
Engineered for Ultimate Serenity.

## PVC



### Product Advantages & Features

This smooth-surface hose is the hygienic choice for family bathrooms and wet rooms. The anti-microbial PVC material is incredibly easy to wipe clean, preventing limescale and mold. Lightweight and explosion-proof, it offers a safe, comfortable grip for children and the elderly alike.

### Technical Specification

Operating temperature  
-5 to +60°C 23to 140°F

Max. working pressure  
3 bar 44 psi

Tensile strength  
> 500 N > 112 lbf

Bending radius  
75 mm 3.0"

Outer diameter (braided) max.  
14.5 mm 0.6"

Outer diameter (braided) max.  
8.5 mm 0.3"

Flow rate at 1.5m length  
25.2l/min at 3 bar  
according to DIN EN 1113

### Product Certifications



EN13618



KTW  
W270



### Braiding Options



chrome



copper



gold



brushed  
nickel



bronze



matt white



brushed  
brass



oil-rubbed  
bronze



matt black

### Nut Selection



G1/2"



optionally with key flats





optionally with knurled  
cone



optionally with o-ring and  
key flats

# NYLON SHOWER HOSE

SHOWER SHATTAF

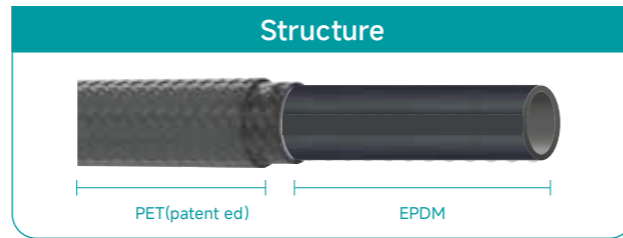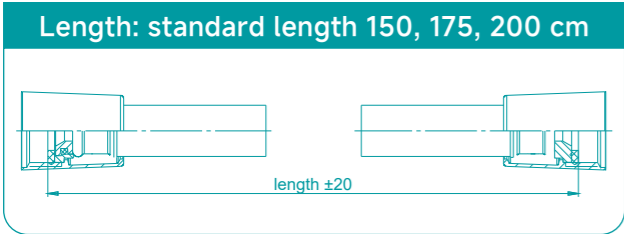

Crafting the Poetry of Fluid Motion.

## EPDM



### Product Advantages & Features

Featuring a high-tensile braided exterior, this hose is designed for heavy-duty use in luxury hotels and homes. It remains soft and flexible under pressure, preventing the annoying "stiffness" of traditional hoses. Our quality-first construction ensures it won't leak, providing a whisper-quiet and elegant showering solution.

### Technical Specification

- operating temperature  
-5to +60°C 23 to 140°F
- Recomm.working pressure  
4 bar 58 psi
- Max. working pressure  
7.5 bar 109 psi
- Tensile strength  
> 800 N > 180 lbf
- Bending radius  
25 mm 1.0"
- Outer diameter (braided) max.  
14.8 mm 0.6"
- Inner diameter (hose)  
8.5 mm 0.3"
- Flow rate  
(300 mm, 3 bar, open atmosphere)  
26 l/min 6.9 gpm
- Pressure jump resistant (23° C)  
Upto 16 bar 232 psi

### Product Certifications



### Braiding Options



### Nut Selection

